





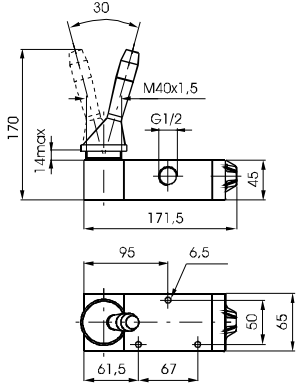
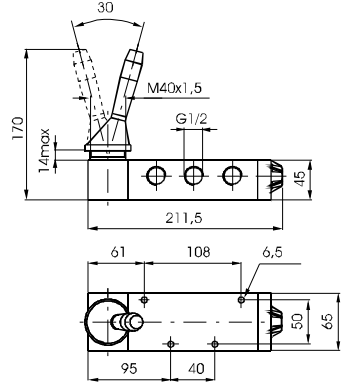



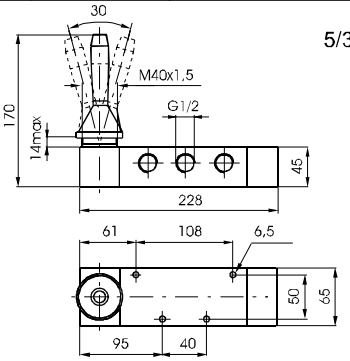



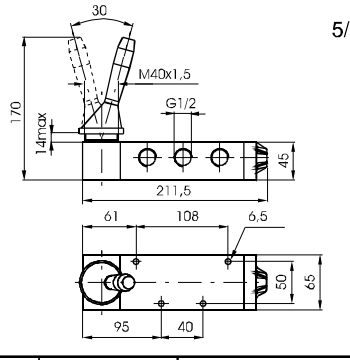




阀 3/2-5/2-5/3
G1/2"

200系列

前置杠杆 弹簧		3/2		5/2			
订货号							
3/2	5/2						
212.32.9.1	212.52.9.1						
							
重量1480克	重量1765克						
前置杠杆 2档							
订货号							
3/2	5/2						
212.32.9	212.52.9						
							
重量1460克	重量1745克						
							
							
工作特性	介质	最大工作压力	适用温度范围		6 bar时的标准流量 $\Delta p = 1$	安装孔径	接口尺寸
	过滤的润滑空气	10 bar	最低 -5°C	最高 +70°C	3500 NI/min (3/2-5/2)	15 mm	G 1/2"
前置杠杆 弹簧-3档						5/3	
订货号							
中闭		中开					
212.53.31.9.1		212.53.32.9.1					
							
							
		重量2100克					
前置杠杆 3档						5/3	
订货号							
中闭		中开					
212.53.31.9		212.53.32.9					
							
							
		重量1765克					
工作特性	介质	最大工作压力	适用温度范围		6 bar时的标准流量 $\Delta p = 1$	安装孔径	接口尺寸
	过滤的润滑空气	10 bar	最低 -5°C	最高 +70°C	3000 NI/min	15 mm	G 1/2"

阀 3/2-5/2-5/3 G1"

200系列



前置杠杆 弹簧		3/2		5/2			
订货号							
3/2 211.32.9.1	5/2 211.52.9.1						
		重量4300克		重量4900克			
前置杠杆 2档		3/2		5/2			
订货号							
3/2 211.32.9	5/2 211.52.9						
		重量4300克		重量4900克			
前置杠杆 弹簧-3档				5/3			
订货号							
中闭 211.53.31.9.1	中开 211.53.32.9.1						
		重量5000克					
前置杠杆 3档				5/3			
订货号							
中闭 211.53.31.9	中开 211.53.32.9						
		重量5000克					
工作特性	介质	最大工作压力	适用温度范围		6 bar时的标准流量 $\Delta p = 1$	安装孔径	接口尺寸
	过滤的润滑空气	10 bar	最低 -5°C	最高 +70°C	6500 NI/min	20 mm	G 1"

2